



1 Connect the Home Dock and Dock the Radio

Select a location in close proximity to your stereo system or powered speakers, and also where the cable from the Indoor/Outdoor Home Antenna can reach the Home Dock. The location should be easily accessible and provide good visibility of the display, but should not be located where it will be in direct sunlight, which will reduce the visibility of the display screen.


A. Connect the Indoor/Outdoor Home Antenna to the **silver ANT** connector at the rear of the Home Dock.

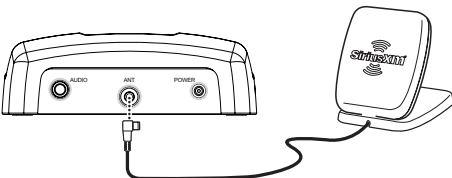

B. Connect the Home Power Adapter to the **red Power** connector at the rear of the Home Dock, and plug it into a wall outlet.

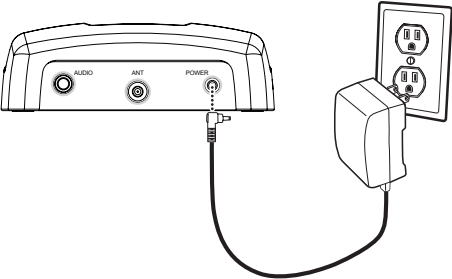



C. Place your Onyx EZ in the Home Dock.




D. Power on your Onyx EZ by pressing the **Power button**.

2 Place & Aim the Indoor/Outdoor Home Antenna

- A.** Check the signal strength indicator on the Radio's screen. If there are 2 or 3 bars of signal strength, continue with step 3. If not, continue with step B below.
- B.** Access the **Signal Indicator** screen by pressing **menu** and then pressing ▼ to scroll to and highlight **Signal Indicator**. Press the **Select button**.
- C.** Try experimenting with the Indoor/Outdoor Home Antenna to get a feel for the reception in your location. If either the Satellite or the Terrestrial signal bar (or both) are more than half filled, you are receiving a good signal and are done aiming the antenna. Press and hold **menu** to exit the **Signal Indicator** screen. The radio should be tuned to channel 1, the XM Preview channel. Continue with step 3.
- D.** If you are not yet receiving a good signal, move the antenna around the room or from room to room. Aim it at different windows, try moving the antenna closer to a window, ideally one that is facing due south.



Not sure which way is south? Think about where the sun rises (in the east) and sets (in the west). Then stand so that east is to your left and you'll be facing south. Is there a window in the direction you're facing? Place the antenna on the windowsill making sure it faces the glass and not the window frame. If you are receiving a good Satellite or Terrestrial signal (or both), you're done aiming the antenna. Press and hold **menu** to exit the **Signal Indicator** screen. The radio should be tuned to channel 1, the XM Preview channel. Continue with step 3.




If you were unable to find an indoor location for the antenna, you will need to place it outdoors. Refer to "Step 2: Place and Aim the Indoor/Outdoor Home Antenna" in the User Guide for outdoor location options. Go to www.siriusxm.com/guides for the Onyx EZ User Guide (with Home Kit).

3 Connect the Audio

The Home Dock can be connected to your stereo system, or to a set of powered speakers.


To Connect the Home Dock to Your Stereo System:

- A.** Take the provided Stereo Audio Cable and connect the single connector to the **green AUDIO** connector at the rear of the Home Dock.
- B.** Connect the white left and red right Stereo Audio Cable connectors ("L" and "R" are also on each respective tip) to any available input other than PHONO on your stereo system. (If your stereo's inputs are marked red and black, connect the white plug to the black input.)
- C.** Turn the stereo system On, and make sure you select the correct input on your stereo system for the AUX In or LINE In connection.
- D.** If you have connected everything correctly, and you are receiving the XM signal, you should hear the XM audio from channel 1.
- E.** The audio level of your Radio can also be adjusted, if necessary. Refer to "Set Audio Level" in the User Guide to adjust the audio level. Go to www.siriusxm.com/guides for the Onyx EZ User Guide (with Home Kit).

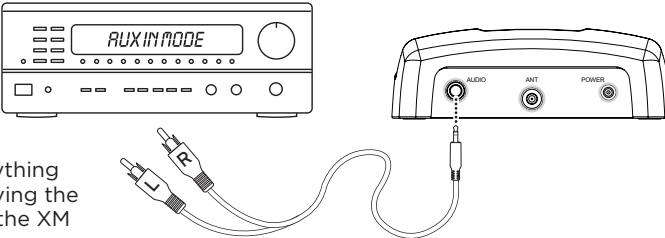

To Connect the Home Dock to Your Powered Speakers:

- A.** Connect the powered speakers to the **green AUDIO** connector at the rear of the Home Dock.
- B.** Plug the powered speakers into a wall outlet.
- C.** Turn On the powered speakers.
- D.** If you have connected everything correctly, and you are receiving the XM signal, you should hear the XM audio from channel 1.
- E.** The audio level of your Radio can also be adjusted, if necessary. Refer to "Set Audio Level" in the User Guide to adjust the audio level. Go to www.siriusxm.com/guides for the Onyx EZ User Guide (with Home Kit).

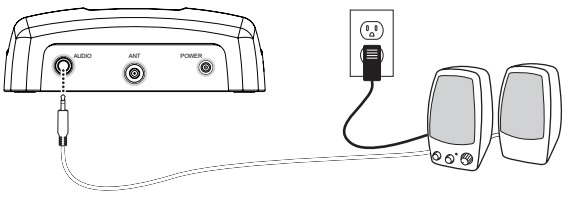

4 Subscribe

You can either follow the general activation and subscription process or use the on-board activation guide to activate your Onyx EZ and subscribe to the XM service.

General activation and subscription process:

- A.** Make sure your Onyx EZ is turned on, receiving the XM signal, and tuned to XM channel 1 so that you can hear XM audio.
- B.** Make a note of your XM Radio ID. You can find it by selecting **Radio ID** in menu items, by tuning to channel 0, on a label on the bottom of the gift box, and on the label on the back of your Onyx EZ.
- C.** To subscribe:
 - Online: Go to www.siriusxm.com/activatenow to access or set up an online account, subscribe to the service, and activate your Radio.
 - OR
 - By phone: Call 1-866-635-2349.

Activation usually takes 10 to 15 minutes after you have completed the subscription process, but may take up to an hour. We recommend that your



*The phone number shown above may differ from the one shown on your Onyx EZ. All numbers are valid.

Radio remain on until subscribed. Once subscribed, the Radio will receive and you can tune to channels in your subscription plan.

Press ▲ or ▼ to tune to other channels, and ◀ or ▶ to browse the different categories of channels. Learn what all the buttons do on the opposite side of this Quick Start Guide.

Activation guide:

For your convenience, Onyx EZ has an on-board activation guide. You can activate your radio and subscribe to the XM service by using this guide, where you will be guided step-by-step through the subscription process. To access and use the guide, simply follow these steps:

- A.** Turn Onyx EZ on and press the **menu button**.
- B.** **Activate Radio** will be highlighted. Press the **Select button**.
- C.** Follow the directions on each successive screen until you complete the subscription process.





Onyx EZ QUICK START GUIDE



Self installation instructions and tips are provided for your convenience. It is your responsibility to determine if you have the knowledge, skills and physical ability required to properly perform an installation. SiriusXM shall have no liability for damage or injury resulting from the installation or use of any SiriusXM or third party products. SiriusXM product warranties do not cover the installation, removal or reinstallation of any product.

Sirius XM Radio Inc.
1221 Avenue of the Americas
New York, NY 10020

1.866.635.2349

siriusxm.com


© 2013 Sirius XM Radio Inc.

XEZ1HKQSG 130419a




Onyx EZ Main Display

When listening to a channel, information about the channel and what is currently playing is displayed.

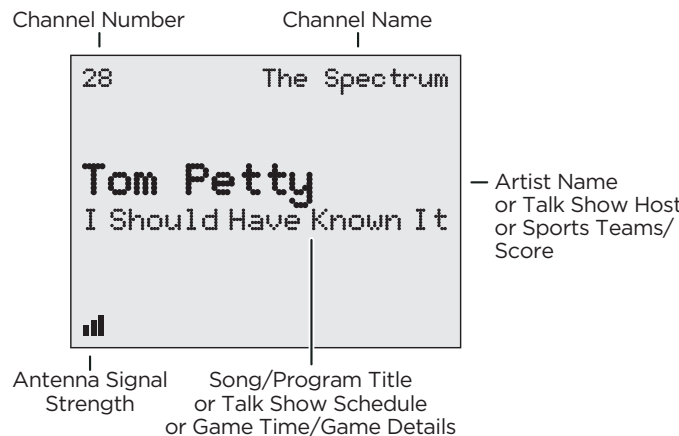

Remote Control Functions

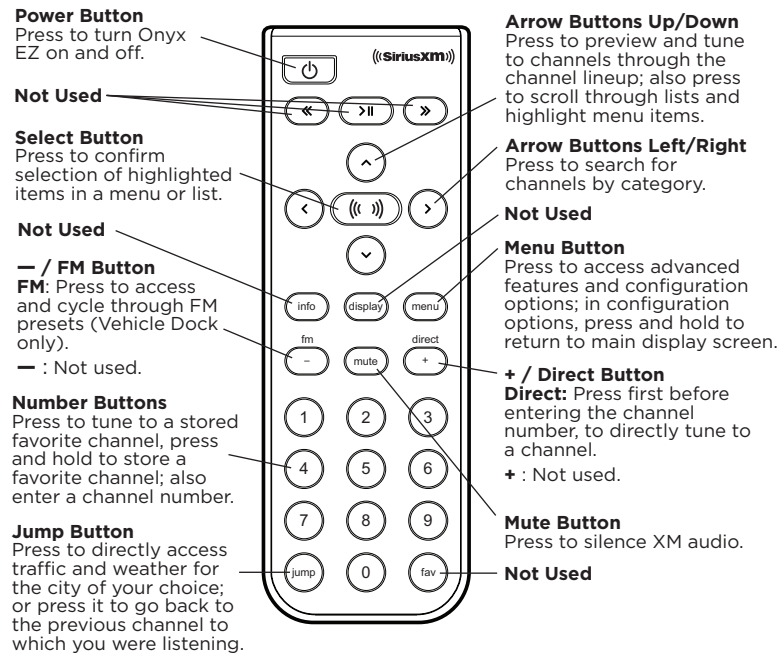

Important Legal Information


© 2013 Sirius XM Radio Inc. "Sirius", "XM" and all related marks and logos are trademarks of Sirius XM Radio Inc. and its subsidiaries. "BBC" and "Radio One" are trademarks of the British Broadcasting Corporation and are used under license. BBC logo © BBC 1996. Radio 1 logo © BBC 2001. Cosmopolitan is a registered trademark of Hearst Communications, Inc. Elvis Radio logo © EPE Reg. U.S. Pat & TM off. IndyCar (and Design) are registered trademarks of Brickyard Trademarks, Inc., used with permission. Major League Baseball trademarks and copyrights are used with permission of Major League Baseball Properties, Inc. Visit the official website at MLB.com. Games subject to availability and change and may not include all spring training games. All rights reserved. NASCAR is a registered trademark of the National Association for Stock Car Auto Racing, Inc. The NBA identifications are the intellectual property of NBA Properties, Inc. and the respective NBA member teams. © 2013 NBA Properties, Inc. © 2011 NFL Properties LLC. All NFL-related trademarks are trademarks of the National Football League. NHL and the NHL Shield are registered trademarks of the National Hockey League. © NHL 2013. All NHL logos and marks and NHL team logos and marks depicted herein are the property of the NHL and the respective teams and may not be reproduced without the prior written consent of NHL Enterprises, L.P. The Home Ice channel is a registered trademark of XM Satellite Radio Inc. The Swinger Golfer logo is a registered trademark of PGA TOUR, Inc. Visit www.siriusxm.com/channellineup for updates. All programming/channel lineup/XM service subject to change or preemption. All other marks and logos are the property of their respective owners. All rights reserved.

IMPORTANT NOTICE: REQUIRED SUBSCRIPTION
Hardware and subscription sold separately, and activation fee required. Other fees and taxes may apply. **Subscriptions governed by SiriusXM Customer Agreement; see www.siriusxm.com.** Prices and programming are subject to change. **Service automatically renews into the subscription Package you choose (which may differ from the Package which arrived with the Radio), for additional periods of the same length, and automatically bills at the then current rates, after any complimentary trial or promotional period ends, until you call us at 1-866-635-2349 to cancel.** XM U.S. Satellite service available only to those at least 18 years of age in the 48 contiguous USA and DC, while SiriusXM Internet Radio is available throughout our satellite area and also AK, HI and PR.


FCC Statement: The user is cautioned that changes or modifications not expressly approved by Sirius XM Radio Inc. can void the user's authority to operate this device. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference. 2. This device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the installation instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: •Reorient or relocate the receiving antenna of the affected receiver. •Increase the separation between the SiriusXM equipment and the affected receiver. •Connect the SiriusXM equipment into an outlet on a circuit different from that to which the affected receiver is connected. •Consult the dealer or an experienced radio/TV technician for help. **WARNING!** The FCC and FAA have not certified this Satellite Radio Receiver for use in any aircraft (neither portable nor permanent installation). Therefore, Sirius XM Radio Inc. cannot support this type of application or installation.




What's in the Box?

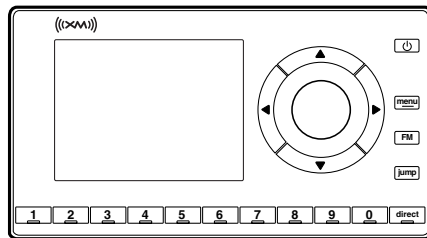


Onyx EZ Radio

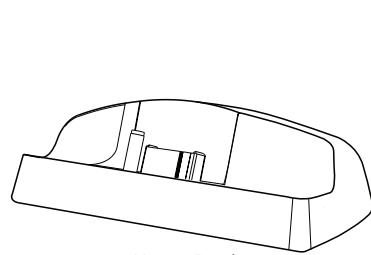


Home Dock




Remote Control



Indoor/
Outdoor Home
Antenna




Home Power
Adapter



Stereo Audio
Cable



Onyx EZ Button Functions

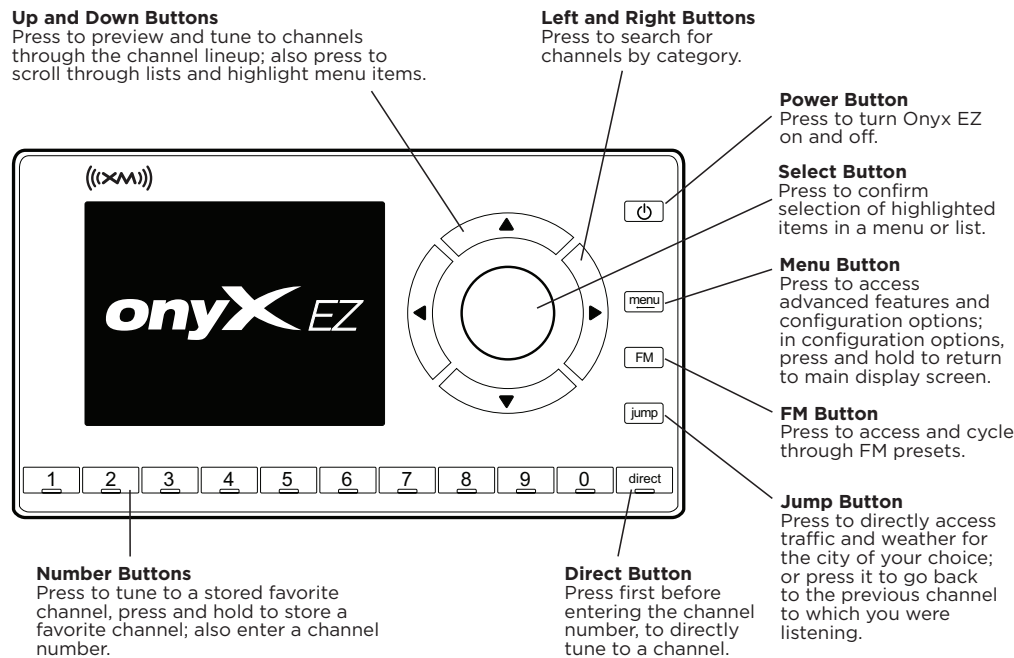

Specifications

System	
Power Requirements:	110 V AC, 400 mA (max)
Operating Temperature:	-4°F to +140°F (-20°C to +60°C)
Audio Output:	1.5 V _{rms} (max)
Onyx EZ Radio	
Dimensions:	4.5 in (W) x 2.4 in (H) x 0.7 in (D) 115 mm (W) x 61 mm (H) x 17 mm (D)
Weight:	3.4 oz (95 g)
Home Dock	
Dimensions:	3.6 in (W) x 1.1 in (H) x 1.5 in (D) 93 mm (W) x 29 mm (H) x 38 mm (D)
Weight:	3.8 oz (109 g)
Audio Connector:	1/8 in (3.5 mm) female
Antenna Connector:	SMB male
Home Power Adapter	
Input:	100-240 V AC, 50-60 Hz, 0.4 A
Output:	5.2 V DC, 1.6 A
Indoor/Outdoor Home Antenna	
Type:	XM Indoor/Outdoor
Connector:	SMB female, right angle
Cable Length:	20 ft (6.1 m)
Stereo Audio Cable	
Connectors:	1/8 in (3.5 mm) stereo male to RCA left & right
Cable Length:	9 ft (91 cm)